

## UNDERGROUND OUTLET SPECIFICATIONS

Conduits and appurtenances shall be installed to the line and grade shown in the plans or as staked in the field and according to the recommendations \* of the manufacturers. Conduits shall be bedded and backfilled as shown in the plans or as described in the specifications for the job. Mechanical compaction, water packing, or other means of compaction shall be specified in the plans or in the specifications for the job.

\*See Figure 1.

Materials shall meet the requirements of this standard and those in the plans or in the specifications for the job. The ends of the conduits shall be protected during installation. All appurtenant structures, including trash and animal guards, shall be installed promptly, and provisions shall be made for protecting them during installation.

Work areas shall be restored to their former condition or as required in the plans and in the specifications for the job. Vegetation or other protective cover shall be established promptly.

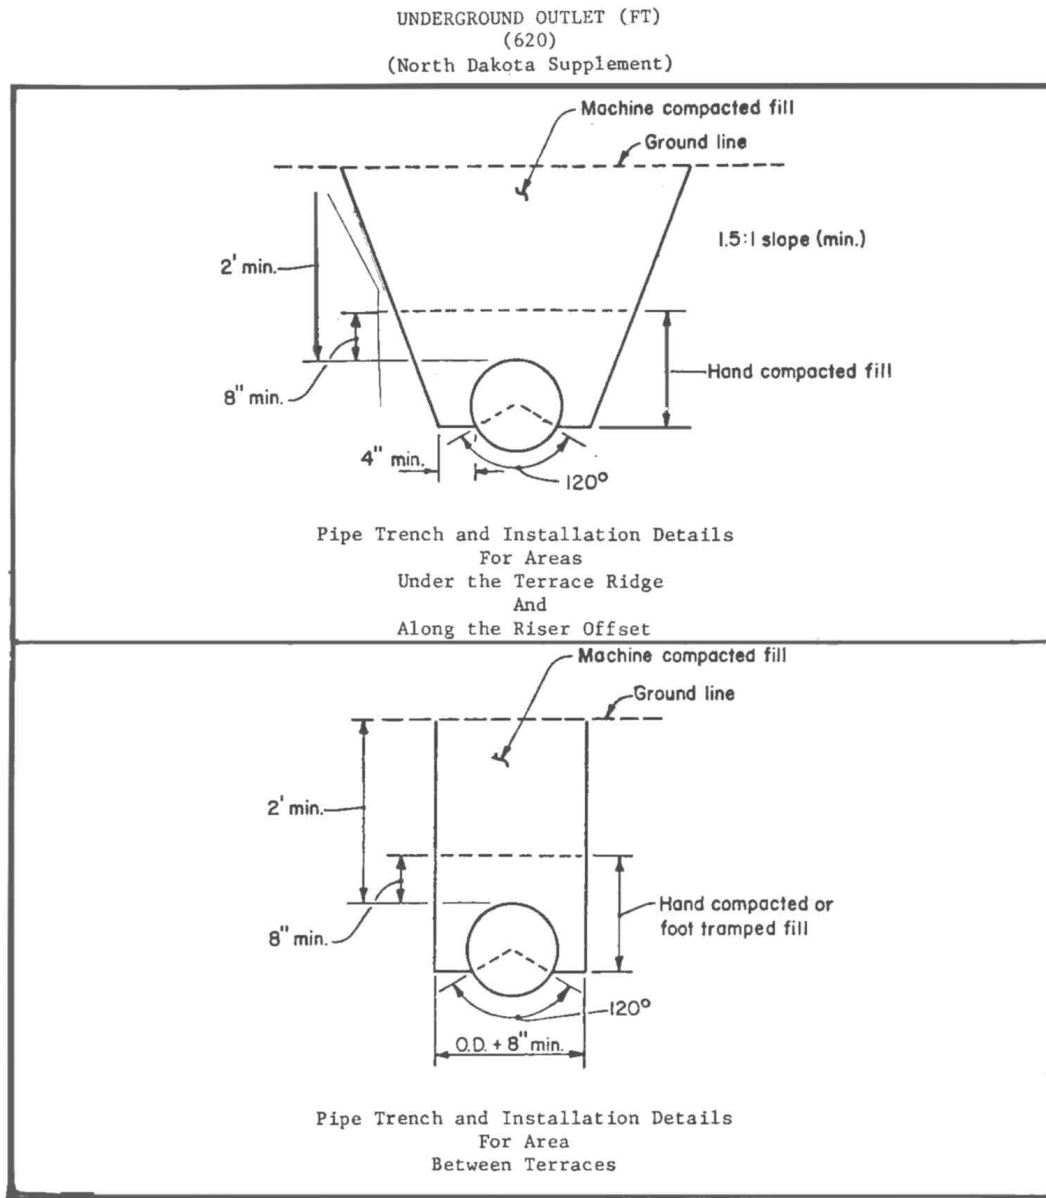


Figure 1